

This outward opening version offers flexible design options for traditional, contemporary or modern styling. The doors are suitable for a range of threshold options including mobility access.

The double doors are energy efficient and PAS 24:2016 certified for high security.



Specification

Outer Frame Options	Head & Jambs: 58mm x 96mm Cill: 58mm x 96mm (Standard) Transom & Mullion: 68mm x 96mm
Sash	Top Rail and Stiles: 110mm x 56mm (PAS24:2016) Bottom Rail: 190mm x 56mm Meeting Rails: 18mm x 5mm
Sash Profile	Ovolo or Lambs Tongue
Cill Extension Options	Standard, 47mm, 62mm or 87mm
Glazing	24mm Low E sealed unit (4mm/16mm/4mm) Obscure, sound control, toughened and laminated options available Argon filled cavity Outer perimeter has standard warm edge spacer (black) optional white Security bead glazing system Additional glazing units include 12mm and 14mm options - not PAS 24 tested Curved glass and units with less than 14mm cavity will have aluminium spacer in place of warm edge spacer
Trickle Vent	Concealed trickle vent through head 4600EA

Hardware/Fittings

Hardware	Butt hinges fixed pin, multipoint thunder bolt locking system 3 star security cylinder
Handles	Lever handles, finishes on request
Trickle Vent	Can be fitted through frame head (Head Drip)

Test Data


BS6375 Part 1	Air Permeability Class 2 Watertightness Class 3A Resistance To Wind Load Class 800X
Acoustic Rating	RW(C;Ctr) = 36 (-2,6) db (With Sound Control Glass)
Thermal Rating	U-Value 1.4W/m2K
Security	PAS 24:2016 Lignum Door System

Members of The Joinery Network





Double Doors (Open Out)

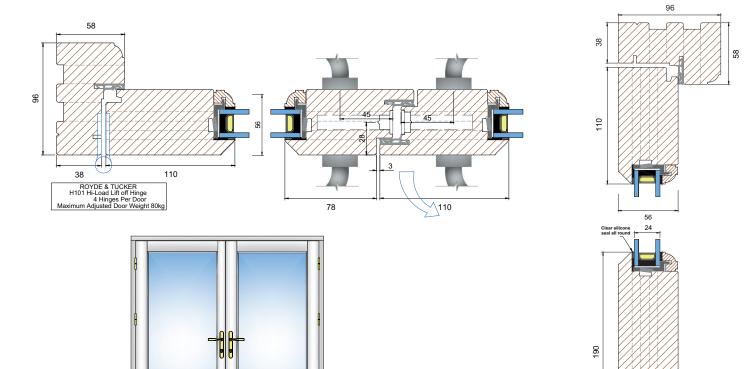

DUE TO CONTINUED DEVELOPMENT THE JOINERY NETWORK RESERVE THE RIGHT TO MODIFY OR CHANGE SPECIFICATIONS WITHOUT PRIOR NOTICE. THIS DRAWING & SPECIFICATIONS ARE THE PROPERTY OF THE JOINERY NETWORK. THEY ARE ISSUED IN STRICT CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURING WITHOUT WRITTEN PERMISSION. ALL MEASUREMENTS ARE FINISHED DIMENSIONS IN MM. DO NOT SCALE DRAWING!



Nine Zero Trading Ltd



Members of

OPTIONAL CILL EXTENSION 47mm, 62mm, 87mm





28