

# NINEZERO

## Single Door (Open In)

Nine Zero timber entrance doors are available to open either outward or inwards.

The Document Q compliant door is energy efficient and features high security multipoint locking.

The flexible inward opening design is suitable for main entrance, side or rear doors. It allows for various glass and solid panel combinations. This makes it easy to produce almost any style of door.

For wide entrances see the Nine Zero Double Door option.



### Specification

<b>Outer Frame Options</b>	Head & Jamb: 58mm x 96mm Transom & Mullion: 68mm x 96mm
<b>Sash</b>	Top Rail and Stiles: 110mm x 56mm (PAS24:2016) Bottom Rail: 190mm x 56mm
<b>Sash Profile</b>	Ovolo or Lambs Tongue
<b>Cill Options</b>	30mm x 96mm 42mm x 96mm, 111mm, 126mm or 141mm
<b>Glazing</b>	24mm Low E sealed unit (4mm/16mm/4mm) Obscure, sound control, toughened and laminated options available Argon filled cavity, outer perimeter has standard warm edge spacer (black) optional white Security bead glazing system  Additional glazing units include 12mm and 14mm options - not PAS 24 tested  Curved glass and units with less than 14mm cavity will have aluminium spacer in place of warm edge spacer
<b>Trickle Vent</b>	Concealed trickle vent through head 4600EA

### Hardware/Fittings

<b>Hardware</b>	Sash catch, sash lifts, sash restrictors and barrel security lock 2 sash catches fitted if frames are PAS 24 security
<b>Handles</b>	Polished Chrome, Satin Chrome, Antique Brass, Oil Rubbed Bronze or Brass Finish
<b>Trickle Vent</b>	Can be fitted through head (concealed)
<b>Test Data</b>	
<b>BS6375 Part 1</b>	Air Permeability Class 3, Watertightness Class 8A to 450PA Resistance To Wind Load Class C5
<b>Acoustic Rating</b>	RW(C;Ctr) = 36 (-2,6) db (With Sound Control Glass)
<b>Thermal Rating</b>	U-Value 1.3W/m2K
<b>Security</b>	PAS 24:2016 Lignum Door System

Members of  
The Joinery Network



PAS 24:2016  
Security



Document Q  
Compliant



Document L  
Compliant



Document M  
Compliant



BS6375-1 2009  
Weather Tightness




Double Glazing

Contact: Nine Zero | 02083 978636 | [www.nine-zero.co.uk](http://www.nine-zero.co.uk)



# Single Door (Open In)

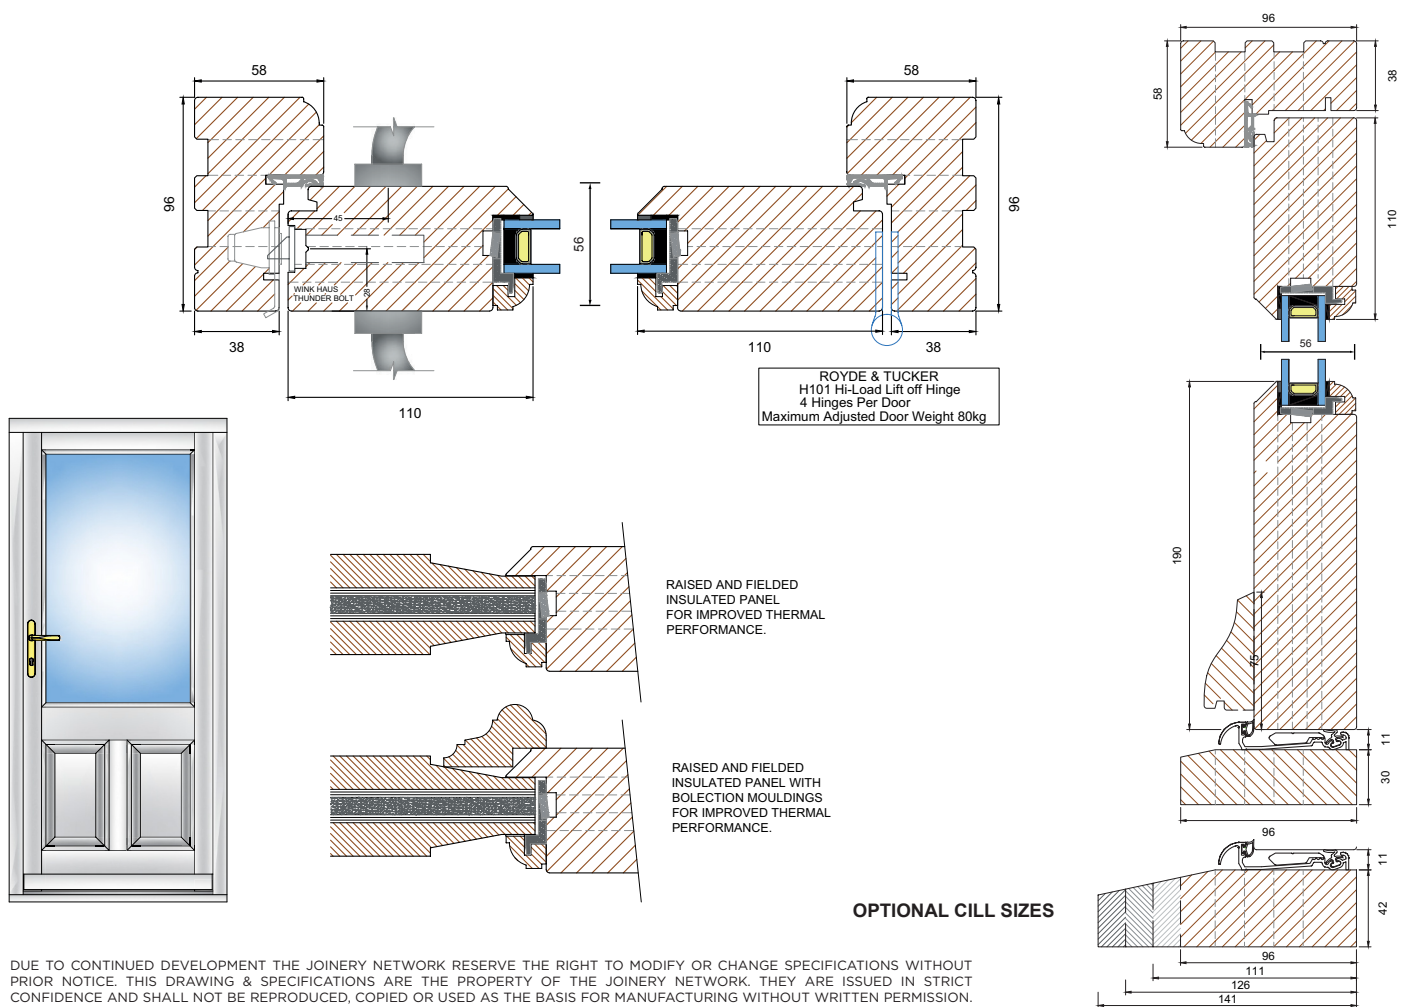

## Design Options

- Lambs Tongue or Ovolo sash profile
- 58mm or 68mm wide outerframe
- Slim outerframe and sash options
- Heritage slim-glass unit bead option

## Design Features

- Tested to PAS 24:2016
- Winkhaus Thunderbolt multipoint locking
- Internally beaded for easy installation
- Deventer superior double weatherseals
- Hi load butt hinges
- Thermally enhanced door panels
- Fully suited window & door system



## Nine Zero Trading Ltd

Unit 9, Chancery Gate Business Centre, Red Lion Road, Surbiton, KT6 7RA

hello@nine-zero.co.uk | 02083 978636 | www.nine-zero.co.uk

Licensed Manufacturer of the Lignum Window & Door System

Members of  
The Joinery Network

