

# NINEZERO

## Single Door (Open Out)

Nine Zero timber entrance doors are available to open either outward or inwards.

This outward opening version is a popular option where there is limited space to open inwards, when used for mobility access or for rear doors.

The Document Q compliant door is energy efficient and highly secure. The door design is very flexible, allowing for various glass and solid panel combinations. This makes it easy to produce almost any style of door.

For wide entrances see the Nine Zero Double Door option.



### Specification

<b>Outer Frame Options</b>	Head & Jambs: 58mm x 96mm Cill: 58mm x 96mm (Standard) Transom & Mullion: 68mm x 96mm
<b>Sash</b>	Top Rail and Stiles: 110mm x 56mm (PAS24:2016) Bottom Rail: 190mm x 56mm
<b>Sash Profile</b>	Ovolo or Lambs Tongue
<b>Cill Extension Options</b>	Standard, 47mm, 62mm or 87mm
<b>Glazing</b>	24mm Low E sealed unit (4mm/16mm/4mm) Obscure, sound control, toughened and laminated options available Argon filled cavity Outer perimeter has standard warm edge spacer (black) optional white Security bead glazing system  Additional glazing units include 12mm and 14mm options - Not PAS 24 tested  Curved glass and units with less than 14mm cavity will have aluminium spacer in place of warm edge spacer
<b>Trickle Vent</b>	Concealed trickle vent through head 4600EA

### Hardware/Fittings

<b>Hardware</b>	Butt hinges fixed pin, multipoint thunder bolt locking system 3 star security cylinder
<b>Handles</b>	Lever handles, finishes on request
<b>Trickle Vent</b>	Can be fitted through frame head (Head Drip)
<b>Test Data</b>	
<b>BS6375 Part 1</b>	Air Permeability Class 4, Watertightness Class 6A Resistance To Wind Load Class C5
<b>Acoustic Rating</b>	RW(C;Ctr) = 36 (-2,6) db (With Sound Control Glass)
<b>Thermal Rating</b>	U-Value 1.4W/m2K
<b>Security</b>	PAS 24:2016 Lignum Door System

Members of  
The Joinery Network



PAS 24:2016  
Security



Document Q  
Compliant



Document L  
Compliant



Document M  
Compliant



BS6375-1 2009  
Weather Tightness




Double Glazing

Contact: Nine Zero | 02083 978636 | [www.nine-zero.co.uk](http://www.nine-zero.co.uk)



## Single Door (Open Out)

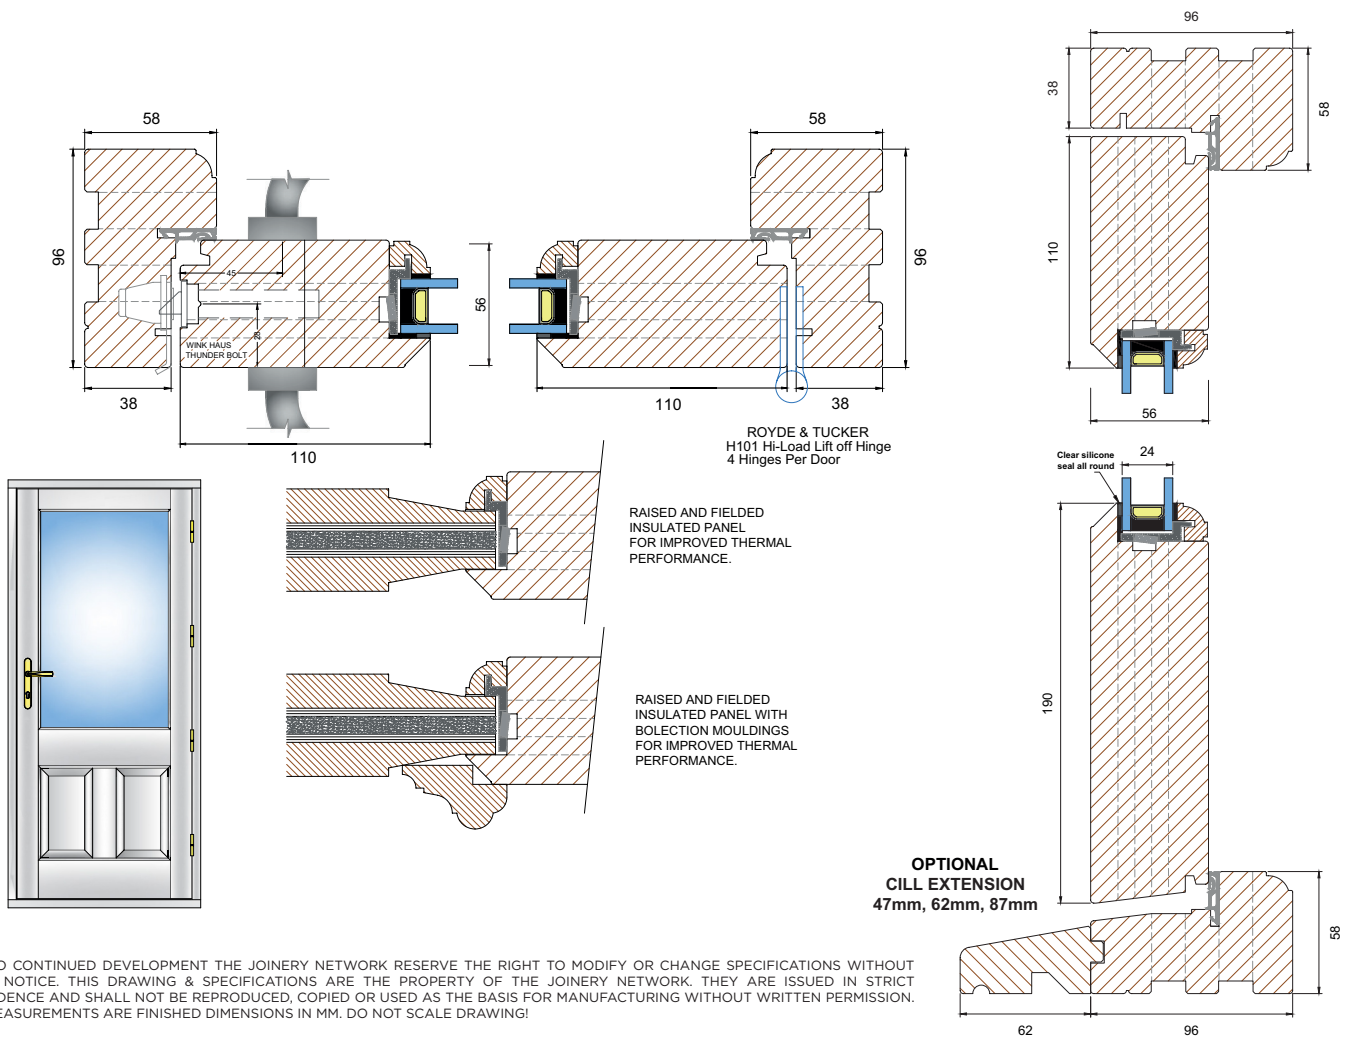

DUE TO CONTINUED DEVELOPMENT THE JOINERY NETWORK RESERVE THE RIGHT TO MODIFY OR CHANGE SPECIFICATIONS WITHOUT  
 PRIOR NOTICE. THIS DRAWING & SPECIFICATIONS ARE THE PROPERTY OF THE JOINERY NETWORK, THEY ARE ISSUED IN STRICT  
 CONFIDENCE AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR MANUFACTURING WITHOUT WRITTEN PERMISSION.  
 ALL MEASUREMENTS ARE FINISHED DIMENSIONS IN MM. DO NOT SCALE DRAWING!

## Design Options

- Lambs Tongue or Ovolo sash profile
- 58mm or 68mm wide outerframe
- Slim outerframe and sash options
- Heritage slim-glass unit bead option

## Design Features

- Tested to PAS 24:2016
- Winkhaus Thunderbolt multipoint locking
- Internally beaded for easy installation
- Deventer superior double weatherseals
- Hi load butt hinges
- Thermally enhanced door panels
- Fully suited window & door system



**Nine Zero Trading Ltd**

Unit 9, Chancery Gate Business Centre, Red Lion Road, Surbiton, KT6 7RA.

hello@nine-zero.co.uk | 02083 978636 | www.nine-zero.co.uk

Licensed Manufacturer of the Lignum Window & Door System

## Members of The Joinery Network

